

SUPER SCORPIO CRANE 30' 37' W/OPTIONAL TELESCOPIC EXTENSION

REMOTE

Arm Pieces

Weight 1 Piece 650 lbs.

Arm Clearance

Width Approx. 1' (12")

Height Approx. 1' 6" (18")

Nose

Check source for head specifics.

Bucket

Width 4' (48")

Removable side handles.

Weights

40 Large @ 30 lbs

Assorted Small

Set-Up Time

Camera ready 1/2 to 1 1/2 hours

Technician Required

Yes No

Base

Length 5' 2" (62")

Width 4' 5" (53")

Height 8' 4" (100")*

Weight 850 lbs.

Track

1 meter (39") Precision Bar Track
(Supplied)

Steering

Conventional

Crab**

Round**

*This is clearance of the crane
at its highest column setting.
Minimum is 6' 10"

**When equipped with
2 sided steering.
Contact source.

Max Built Weight

Approximately 3300 lbs.


Transport Vehicle

Trailer

**Curved compensator
automatically extends
and/or retracts arm for
vertical, horizontal and
angled moves.**

Height Approx. 30'
Check source for
remote head specifics.

Check source
for 7' extension
and remote
head specifics

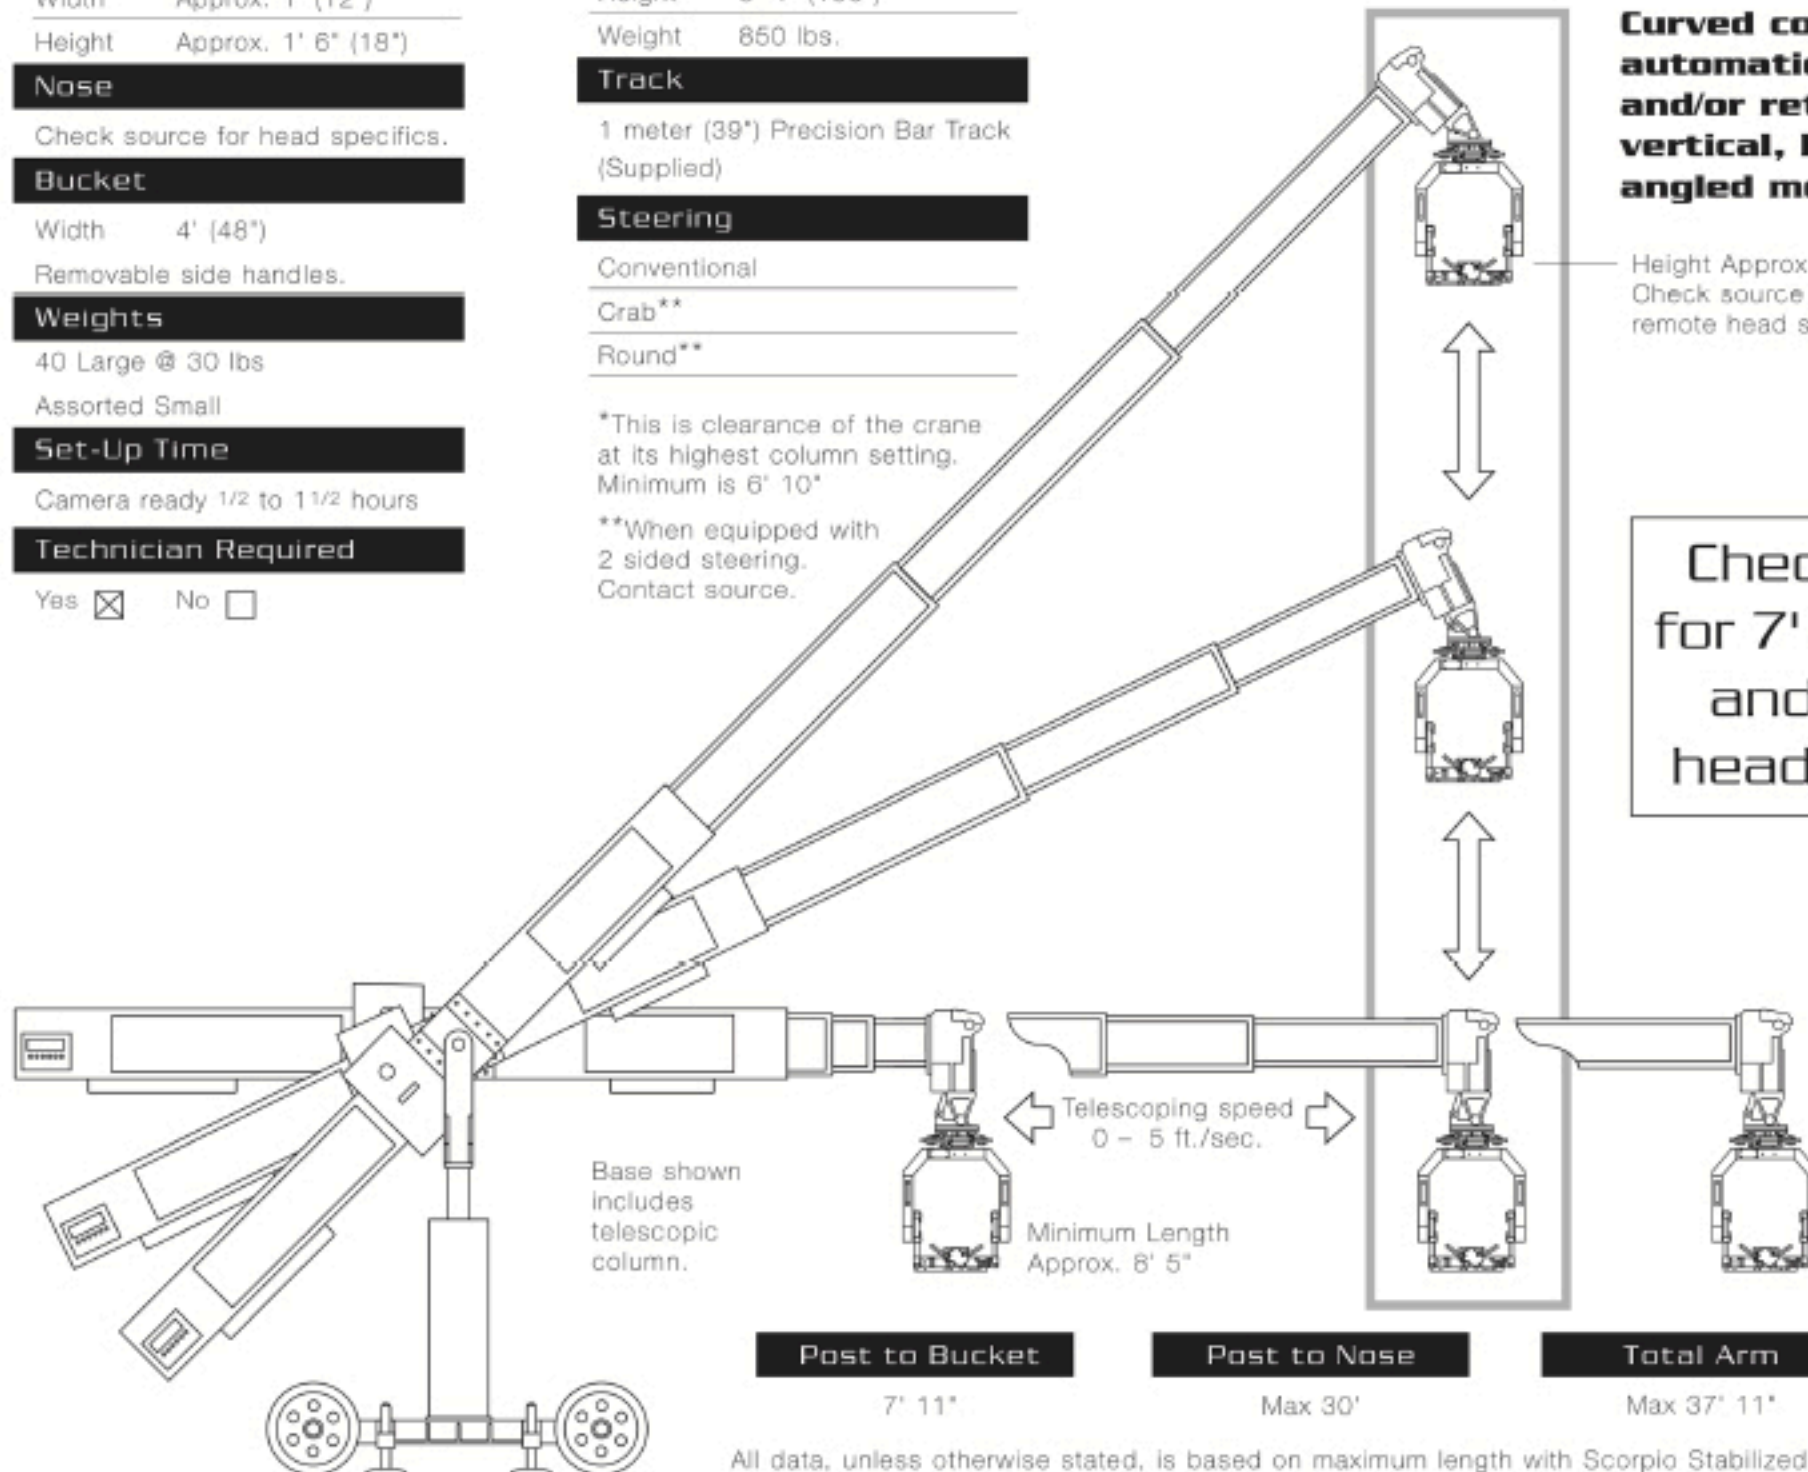

Base shown
includes
telescopic
column.

Telescoping speed
0 - 5 ft./sec.

Minimum Length
Approx. 8' 5"

Post to Bucket

7' 11"

Post to Nose

Max 30'

Total Arm


Max 37' 11"

**The
Crane
Company.**
13105 Saticoy Street
North Hollywood, CA 91605
818.252.7700 / 310.403.2820

Maximum Length
Approx. 30'

All data, unless otherwise stated, is based on maximum length with Scorpio Stabilized Head.

SUPER SCORPIO CRANE 30' 37' W/OPTIONAL TELESCOPIC EXTENSION

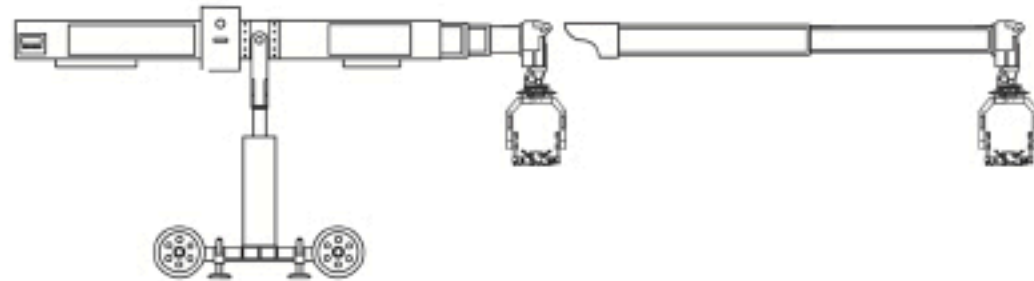

Technical Specifications

Height

Remote

Max. Approx. 30'

Min. Approx. -15' 6"

Length

Remote

Max. Approx. 30'

Min. Approx. 7' 6"

Weight

Max Remote

Arm and Base 3300 lbs.

Check Source for Max. Payload

!! Caution !!

Some weights listed are an approximation. Different cameras, heads, and accessories will alter payload weight, counter-weight, and consequently total weight.

Features

- This re-designed arm is faster, quieter, and smoother than all other telescopic cranes.
- The optional 7' telescopic extension increases the maximum length to 37'. (The extension can only be used with the 2-axis Scorpio Mini Head with a maximum payload of 77 lbs.)
- Curved compensator
- Programmable limits
- Motion capture
- Highly experienced technicians
- Will support most remote head systems
- Can be mounted on, though not limited to, any base with Mitchell mount, or 1" bolt pattern, i.e. Chapman Super Nova, A.T.B. base, or C.S. base
- Will design and/or manufacture any specialized adapters or rigging

**The
Crane
Company.**
13105 Saticoy Street
North Hollywood, CA 91605
818.252.7700 / 310.403.2820